



Metreco Cloud Connect - Manual 4G Gateway - GW01ST - ENG

Created: 30/04/2020 16:04

Metreco Cloud Connect - Manual 4G Gateway - GW01ST - ENG



What you need:

- Micro-Sim card, pin-code deactivated
- Torx T10 screwdriver


Setup Steps:

1. Use a Torx T10 screwdriver to unscrew the 4 screws of the upper side plate holding the power supply connector.




****NEVER*** use the factory reset button, it will erase the Metreco Cloud Connect firmware

2. Deactivate the pin-code of the SIM-card
3. Insert the SIM-card, in micro-format (middle format), in the dedicated SIM-slot, with the contacts facing down

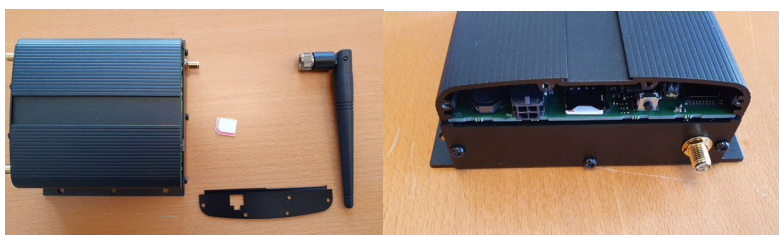

4. Reposition the side plate and screw the 4 screws


5. Mount the "flat" 4G antennas (2pcs)

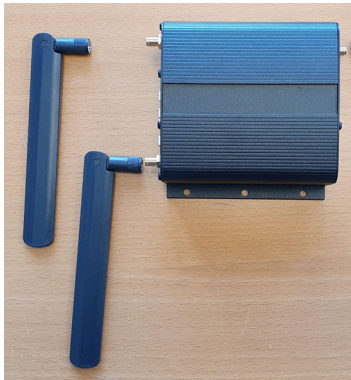

6. Mount the "round" Metreco Radio antenna (1pce)



7. Connect the power supply

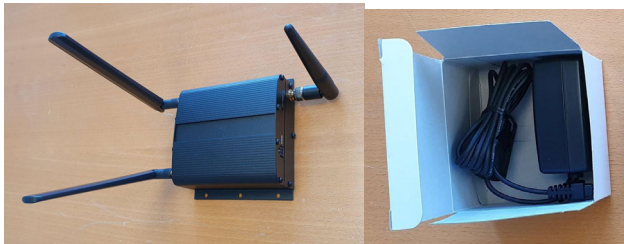

8. When the 2 left LEDs on the front are green (System, WWAN State), the GW01ST is working normally

9. Optional: fix the gateway to the wall or a surface using the foreseen mounting holes

Status LEDs:

LED	Description
System Status	<p>Indicates successful power on and device readiness</p> <p>Off: no power Orange: booting Red: error Green: on Green flashing: n/a</p>
WWAN State	<p>Indicates 4G interface availability and use</p> <p>Off: no power or not connected Orange: on, not connected Red: WWAN error Green: on, connected Green flashing: data traffic</p>
WWAN Signal Strength	<p>Indicates 4G interface signal strength</p> <p>Off: no power or not connected Red: bad signal strength Orange: moderate signal strength Green: good signal strength</p>